

P-1



Roger Kraus Racing Ent, Inc.  
2896 Grove Way, Castro Valley, Calif 94546  
ph 1-510-582-5031 - 1-800-510-7223

### L. Series Vintage

W.T.	Tire Size	Tread Pattern	Racer Price	Hard to Softer> 204	Rim Range	Rim Used	Tire Diam	Cross Section	Tread Width
9	500L10 WET	XR65	288	204	3.5-6	4.5	19.6	6.5	4.7
9	500L10 DRY	CR70	288	204	3.5-6	4.5	19.6	6.5	4.7
12	450L12	CR65	343	204	4-6	5.0	21.3	6.9	4.7
11	450L13	CR65	345	204	4-6	5.0	22.1	6.6	4.5
14	550L13	CR65	372	204	4.5-7	5.5	23.8	8.0	5.0
13	550L14	CR65	398	204	4.5-7	5.5	24.8	7.8	5.0
12	450L15	CR48(R6)	403	204	4-6	5.0	24.0	6.1	4.0
13	500L15	CR65	427	204	4.5-7	6.0	24.8	7.4	4.7
16	550L15	CR65	478	204	4.5-7	6.5	25.9	8.0	5.0
17	550-16 R5	R5	516	204	4.5-6	5.5	27.1	7.0	4.2
16	600L15	CR65	529	204	5-7.5	7.0	26.9	8.8	5.3
19	650L15	CR65	565	204	5.5-8	7.5	27.8	9.4	5.6
22	700L15	CR65	604	204	6-8.5	8.0	28.7	10.4	6.5
18	600L16	CR48(R6)	547	204	5.7	6.0	27.8	7.9	4.8
17	650L16	CR48(R6)	596	204	5.5-7.5	7.0	28.7	8.9	5.1

### Vintage Series

W.T.	Tire Size	Tread Pattern	Racer Price	Hard to Softer> 204	Rim Range	Rim Used	Tire Diam	Cross Section	Tread Width
11	450-15	R5	405	204	3-4.5	4.0	24.0	5.6	0.5
13	500-15	R5	450	204	3-5	4.5	25.0	6.2	3.7
16	550-15	R5	NLM	204	3.5-5.5	5.0	26.2	6.8	4.1
14	600-15	R5	535	204	4-6	5.5	26.6	7.3	4.6
16	650-15	R5	574	204	4.5-6.5	6.0	27.4	8.4	4.9
17	550-16	R5	516	204	4.5-6	5.5	27.1	7.0	4.2
18	600-16	R5	572	204	4.5-7	5.5	28.1	7.6	4.6
19	650-16	R5	606	204	4.5-7.5	5.0	28.9	7.9	4.8
20	700-16	R5	NLM	204	5.5-7.5	7.0	29.1	8.8	4.9
21	550-17	R5	639	204	4-6	4.0	28.1	6.5	3.8
23	700-17	R5	688	204	5-7	6.0	30.2	8.3	4.5
21	550-/600-18	R1	639	204	4-6.5	4.5	30.1	6.9	4.3
28	700-18	R1	721	204	5-7	5.0	32.1	8.8	5.4
16	500-19	5 STUD	555	204	3.5-5.5	4.0	29.6	6.2	3.7
24	600-19	5 STUD	688	204	4-6	4.5	31.0	6.9	4.3
26	650-19	5 STUD	NLM	204	4-6	5.0	31.6	7.8	4.6
27	700-19	R1	757	204	4.5-6.5	5.0	32.9	8.9	5.1

NOTE: The Vintage Series above are Tube Type tires as the wheels made then were not technically designed for tubeless tires. Wire Wheels require tubes.

**PRICES SUBJECT TO CHANGE WITHOUT NOTICE.**

Scroll down for page 2 and Tread Types..

P-2 **M Series**


	Tire	Tread	Racer	Hard to Softer>	Rim	Rim	Tire	Cross	Tread
W.T.	Size	Pattern	Price	204	Range	Used	Diam	Section	Width
11	450M13	CR65	345	204	5-7	5.5	21.7	6.7	4.9
14	525M13	CR65	406	204	5.5-8	5.5	23.2	8.3	5.8
16	550M13	CR65	439	204	7-9	8.0	23.7	9.9	6.9
15	450M14	CR65	457	204	6-9.5	7.0	25.0	8.1	6.0
16	500M15	CR65	484	204	6-8	7.5	25.5	8.7	6.0
19	550M15	CR65	533	204	6.5-8.5	8.0	26.0	9.5	6.5
21	600M15	CR65	552	204	7-9	8.5	27.0	10.7	7.0
21	650M15	CR65	583	204	8-10	9.0	28.0	11.6	8.0

**POST HISTORIC**

	Tire	Tread	Racer	Hard to Softer	Rim	Rim	Tire	Cross	Tread	
W.T.	Size	Pattern	Price	204	484	Range	Used	Diam	Section	Width
13	175/550-13	CR65	407	484	5.5-8	8.0	21.9	9.1	6.8	
16	475/100-13	CR65	434	484	5.5-8.5	8.0	23.3	9.4	7.1	
21	475/1150-13	CR65	477	484	6.5-10	9.0	22.8	10.8	8.3	
21	600/1200-15	CR65	507	484	9-11	10.0	25.2	12.3	9.4	
22	600/1350-13	CR65	531	484	11-14	12.0	25.0	13.8	10.8	
	430/1160-15	CR65	531	484	7-11	9.5	23.7	11.3	9.1	
15	475/1000-15	CR65	467	484	6-9	8.0	24.7	9.8	7.1	
21	525-1050-15	CR65	531	484	7.5-10	8.5	25.7	10.3	8.0	
22	530/1360-15	CR65	572	484	10-13	12.0	25.7	13.6	11.2	
22	600/1200-15	CR65	530	484	9-11.5	10.0	26.6	12.4	9.4	
	530/1500-15	CR65	609	484	11-15.5	18.0	25.5	16.0	12.6	
	530/1600-15	CR65	663	484	14-17	17.0	25.5	17.5	14.3	

P-2 **Formula V**

	Tire	Tread	Racer	Hard to Softer	Rim	Rim	Tire	Cross	Tread
W.T.	Size	Pattern	Price	434	Range	Used	Diam	Section	Width
10.3	120/590-15	CR82	303	434	4-5.5	4.5	22.8	6.3	4.7
14.3	135/620-15	CR82	318	434	4.5-6	4.5	24.3	7.5	6.5

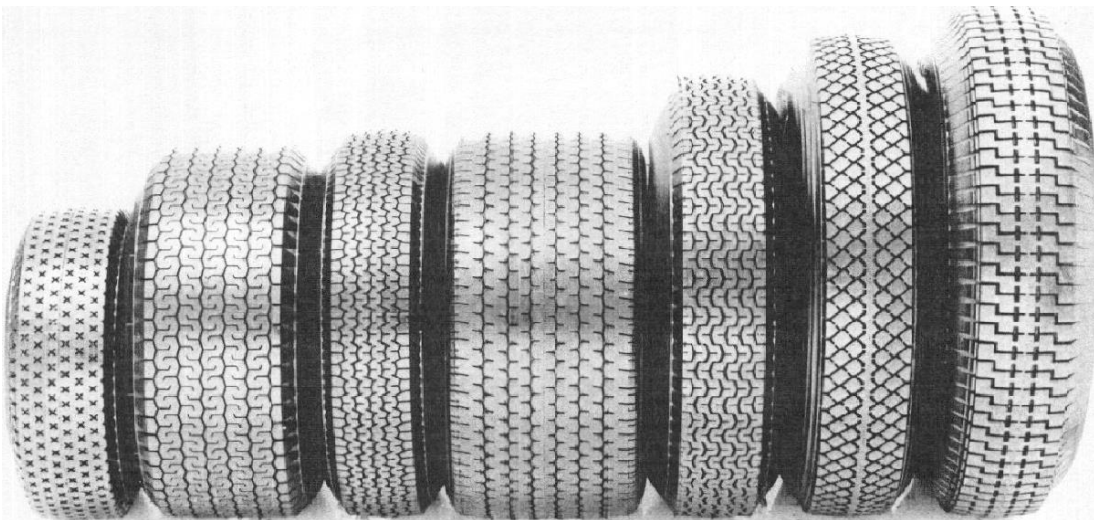

**Dunlop Vintage Tread Patterns**  
**CR-70 CR-65 CR-48 CR-82 R-5 R-1 5-STUD**