

P-1



Roger Kraus Racing Ent, Inc.

2896 Grove Way, Castro Valley, Calif 94546

phone 1-510-582-5031 - 1-800-510-7223

L. Series Vintage

03/2020

W.T.	Tire Size	Tread Pattern	Racer Price	Hard to Softer> 204	Rim Range	Rim Used	Tire Diam	Cross Section	Tread Width
9	500L10 WET	XR65	288	204	3.5-6	4.5	19.6	6.5	4.7
9	500L10 DRY	CR70	288	204	3.5-6	4.5	19.6	6.5	4.7
12	450L12	CR65	343	204	4-6	5.0	21.3	6.9	4.7
11	450L13	CR65	345	204	4-6	5.0	22.1	6.6	4.5
14	550L13	CR65	372	204	4.5-7	5.5	23.8	8.0	5.0
13	550L14	CR65	398	204	4.5-7	5.5	24.8	7.8	5.0
12	450L15	CR48(R6)	403	204	4-6	5.0	24.0	6.1	4.0
13	500L15	CR65	427	204	4.5-7	6.0	24.8	7.4	4.7
16	550L15	CR65	478	204	4.5-7	6.5	25.9	8.0	5.0
17	550-16 R5	R5	516	204	4.5-6	5.5	27.1	7.0	4.2
16	600L15	CR65	529	204	5-7.5	7.0	26.9	8.8	5.3
19	650L15	CR65	565	204	5.5-8	7.5	27.8	9.4	5.6
22	700L15	CR65	604	204	6-8.5	8.0	28.7	10.4	6.5
18	600L16	CR48(R6)	547	204	5.7	6.0	27.8	7.9	4.8
17	650L16	CR48(R6)	596	204	5.5-7.5	7.0	28.7	8.9	5.1

Vintage Series

W.T.	Tire Size	Tread Pattern	Racer Price	Hard to Softer> 204	Rim Range	Rim Used	Tire Diam	Cross Section	Tread Width
11	450-15	R5	405	204	3-4.5	4.0	24.0	5.6	0.5
13	500-15	R5	450	204	3-5	4.5	25.0	6.2	3.7
16	550-15	R5	NLM	204	3.5-5.5	5.0	26.2	6.8	4.1
14	600-15	R5	535	204	4-6	5.5	26.6	7.3	4.6
16	650-15	R5	574	204	4.5-6.5	6.0	27.4	8.4	4.9
17	550-16	R5	516	204	4.5-6	5.5	27.1	7.0	4.2
18	600-16	R5	572	204	4.5-7	5.5	28.1	7.6	4.6
19	650-16	R5	606	204	4.5-7.5	5.0	28.9	7.9	4.8
20	700-16	R5	NLM	204	5.5-7.5	7.0	29.1	8.8	4.9
21	550-17	R5	639	204	4-6	4.0	28.1	6.5	3.8
23	700-17	R5	688	204	5-7	6.0	30.2	8.3	4.5
21	550-/600-18	R1	639	204	4-6.5	4.5	30.1	6.9	4.3
28	700-18	R1	721	204	5-7	5.0	32.1	8.8	5.4
16	500-19	5 STUD	555	204	3.5-5.5	4.0	29.6	6.2	3.7
24	600-19	5 STUD	688	204	4-6	4.5	31.0	6.9	4.3
26	650-19	5 STUD	NLM	204	4-6	5.0	31.6	7.8	4.6
27	700-19	R1	757	204	4.5-6.5	5.0	32.9	8.9	5.1

NOTE: The Vintage Series above are Tube Type tires as the wheels made then were not technically designed for tubeless tires. Wire Wheels require tubes.

PRICES SUBJECT TO CHANGE WITHOUT NOTICE.

Evolution of Dunlop Racing Tires. 1934 5 STUD, 1946 R1, 1955 R3, 1956 R4 as a wet.

1958 R5, 1962 R6 (CR48), 1965 R7 (CR65). 1966 CR70, 1968 CR82, 1968 CR84, Complements of our friend Russell Stuckey, Australia.

Scroll down for page 2 and Tread Types..

P-2 **M Series**

03/2020


	Tire	Tread	Racer	Hard to Softer>	Rim	Rim	Tire	Cross	Tread
W.T.	Size	Pattern	Price	204	Range	Used	Diam	Section	Width
11	450M13	CR65	345	204	5-7	5.5	21.7	6.7	4.9
14	525M13	CR65	406	204	5.5-8	5.5	23.2	8.3	5.8
16	550M13	CR65	439	204	7-9	8.0	23.7	9.9	6.9
15	550M14	CR65	457	204	6-9.5	7.0	25.0	8.1	6.0
16	500M15	CR65	484	204	6-8	7.5	25.5	8.7	6.0
19	550M15	CR65	533	204	6.5-8.5	8.0	26.0	9.5	6.5
21	600M15	CR65	552	204	7-9	8.5	27.0	10.7	7.0
21	650M15	CR65	583	204	8-10	9.0	28.0	11.6	8.0

POST HISTORIC

	Tire	Tread	Racer	Hard to Softer	Rim	Rim	Tire	Cross	Tread	
W.T.	Size	Pattern	Price	204	484	Range	Used	Diam	Section	Width
13	175/550-13	CR65	407	484	5.5-8	8.0	21.9	9.1	6.8	
16	475/1000-13	CR65	434	484	5.5-8.5	8.0	23.3	9.4	7.1	
21	475/1150-13	CR65	477	484	6.5-10	9.0	22.8	10.8	8.3	
21	600/1200-13	CR65	507	484	9-11	10.0	25.2	12.3	9.4	
22	600/1350-13	CR65	531	484	11-14	12.0	25.0	13.8	10.8	
	430/1160-15	CR65	531	484	7-11	9.5	23.7	11.3	9.1	
15	475/1000-15	CR65	467	484	6-9	8.0	24.7	9.8	7.1	
21	525-1050-15	CR65	531	484	7.5-10	8.5	25.7	10.3	8.0	
22	530/1360-15	CR65	572	484	10-13	12.0	25.7	13.6	11.2	
22	600/1200-15	CR65	530	484	9-11.5	10.0	26.6	12.4	9.4	
	530/1500-15	CR65	609	484	11-15.5	18.0	25.5	16.0	12.6	
	530/1600-15	CR65	663	484	14-17	17.0	25.5	17.5	14.3	

P-2 **Formula V**

	Tire	Tread	Racer	Hard to Softer	Rim	Rim	Tire	Cross	Tread
W.T.	Size	Pattern	Price	434	Range	Used	Diam	Section	Width
10.3	120/590-15	CR82	303	434	4-5.5	4.5	22.8	6.3	4.7
14.3	135/620-15	CR82	318	434	4.5-6	4.5	24.3	7.5	6.5

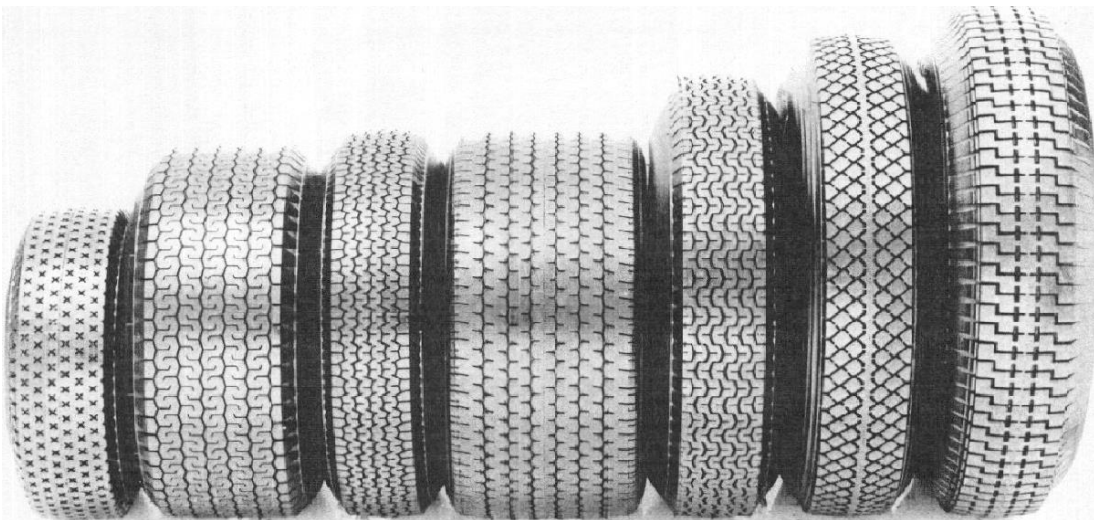

Dunlop Vintage Tread Patterns
CR-70 CR-65 CR-48 CR-82 R-5 R-1 5-STUD