



Roger Kraus Racing Ent, Inc. P 1 of 2  
 2896 Grove Way, Castro Valley, Calif 94546  
 phone 1-510-582-5031 - 1-800-510-7223

**L. Series Vintage**

1/2024

KG	LBS	Tire Size	Tread Pattern	Racer Price	Hard to Softer> 204	Rim Range	Rim Used	Tire Diam	Cross Section	Tread Width
5.25	11.57	500L10 WET	CR65	348	484	3.5-6	4.5	19.6	6.5	4.7
5.00	11.02	500L10 DRY	CR65	348	204	3.5-6	4.5	19.6	6.5	4.7
5.27	11.62	500L10 DRY	CR70	348	204	3.5-6	4.5	19.6	6.5	4.7
5.51	12.15	450L12	CR65	421	204	4-6	5.0	21.3	6.9	4.7
5.73	12.63	450L13	CR65	423	204	4-6	5.0	22.1	6.6	4.5
7.33	16.16	550L13	CR65	456	204	4.5-7	5.5	23.8	8.0	5.0
7.28	16.05	550L14	CR65	490	204	4.5-7	5.5	24.8	7.8	5.0
6.28	13.84	450L15	CR48(R6)	494	204	4-6	5.0	24.0	6.1	4.0
6.94	15.30	500L15	CR65	525	204	4.5-7	6.0	24.8	7.4	4.7
7.89	17.39	550L15	CR65	588	204	4.5-7	6.5	25.9	8.0	5.0
7.72	17.02	550-16 R5	R5	636	204	4.5-6	5.5	27.1	7.0	4.2
8.52	18.78	600L15	CR65	649	204	5-7.5	7.0	26.9	8.8	5.3
9.62	21.21	650L15	CR65	692	204	5.5-8	7.5	27.8	9.4	5.6
10.31	22.73	700L15	CR65	739	204	6-8.5	8.0	28.7	10.4	6.5
8.41	18.54	600L16	CR48(R6)	672	204	5.7	6.0	27.8	7.9	4.8
8.78	19.36	650L16	CR48(R6)	730	204	5.5-7.5	7.0	28.7	8.9	5.1

**Vintage Series**

KG	LBS	Tire Size	Tread Pattern	Racer Price	Hard to Softer> 204	Rim Range	Rim Used	Tire Diam	Cross Section	Tread Width
4.81	10.60	450-15	R5	501	204	3-4.5	4.0	24.0	5.6	3.5
5.44	11.99	500-15	R5	555	204	3-5	4.5	25.0	6.2	3.8
5.89	12.99	550-15	R5	555	204	3.5-5.5	5.0	26.2	6.8	4.2
6.55	14.44	600-15	R5	658	204	4-6	5.5	26.6	7.3	4.6
7.65	16.87	650-15	R5	705	204	4.5-6.5	6.0	27.4	8.4	4.9
7.72	17.02	550-16	R5	636	204	4.5-6	5.5	27.1	7.0	4.2
9.40	20.72	600-16	R5	703	204	4.5-7	5.5	28.1	7.6	4.8
9.40	20.72	650-16	R5	740	204	4.5-7.5	5.0	28.9	7.9	4.8
		700-16	R5	NLM	204	5.5-7.5	7.0	29.1	8.8	4.9
8.85	19.51	550-17	R5	784	204	4-6	4.0	28.1	6.5	3.8
9.63	21.23	700-17	R5	844	204	5-7	6.0	30.2	8.3	4.5
9.17	20.22	550-/600-18	R1	784	204	4-6.5	4.5	30.1	6.9	4.3
12.96	28.57	700-18	R1	884	204	5-7	5.0	32.1	8.8	5.4
6.93	15.28	500-19	5 STUD	683	204	3.5-5.5	4.0	29.6	6.2	3.7
10.45	23.04	600-19	5 STUD	844	204	4-6	4.5	31.0	6.9	4.3
		650-19	5 STUD	NLM	204	4-6	5.0	31.6	7.8	4.6
13.05	28.77	700-19	R1	929	204	4.5-6.5	5.0	32.9	8.9	5.1

NOTE: The Vintage Series above are Tube Type tires as the wheels made then were not technically designed for tubeless tires. Wire Wheels require tubes.

**PRICES SUBJECT TO CHANGE WITHOUT NOTICE.**

Evolution of Dunlop Racing Tires. 1934 5 STUD, 1946 R1, 1955 R3, 1956 R4 as a wet. 1958 R5, 1962 R6 (CR48), 1965 R7 (CR65). 1966 CR70, 1968 CR82, 1968 CR84, Complements of our friend Russell Stuckey, Australia.

Scroll down for page 2 and Tread Types.


KG	LBS	Tire Size	Tread Pattern	Racer Price	Hard to Softer> 204	Rim Range	Rim Used	Tire Diam	Cross Section	Tread Width
5.67	12.50	450M13	CR65	426	204	5-7	5.5	21.7	6.7	4.9
7.37	16.25	525M13	CR65	501	204	5.5-8	5.5	23.2	8.3	5.8
8.36	18.43	550M13	CR65	539	204	7-9	8.0	23.7	9.9	6.9
7.89	17.39	550M14	CR65	562	204	6-9.5	7.0	25.0	8.1	6.0
7.94	17.50	500M15	CR65	595	204	6-8	7.5	25.5	8.7	6.0
9.37	20.66	550M15	CR65	656	204	6.5-8.5	8.0	26.0	9.5	6.5
10.56	23.28	600M15	CR65	676	204	7-9	8.5	27.0	10.7	7.0
10.73	23.66	650M15	CR65	716	204	8-10	9.0	28.0	11.6	8.0

**POST HISTORIC**

KG	LBS	Tire Size	Tread Pattern	Racer Price	Hard to Softer 204 484	Rim Range	Rim Used	Tire Diam	Cross Section	Tread Width
6.67	14.70	175/550-13	CR65	487	484	5.5-8	8.0	21.9	9.1	6.8
6.80	14.99	475/1000-13	CR65	520	484	5.5-8.5	8.0	23.3	9.4	7.1
7.38	16.27	475/1150-13	CR65	578	484	6.5-10	9.0	22.8	10.8	8.3
9.20	20.28	600/1200-13	CR65	605	484	9-11	10.0	25.2	12.3	9.4
9.45	20.83	600/1350-13	CR65	634	484	11-14	12.0	25.0	13.8	10.8
		240/525-13	CR65	762	484			20.8	9.45	
		300/600-13	CR65	711	484			23.6	11.81	
8.65	19.07	430/1160-15	CR82	634	484	7-11	9.5	23.7	11.3	9.1
8.13	17.92	475/1000-15	CR65	557	484	6-9	8.0	24.7	9.8	7.1
8.70	19.18	525-1050-15	CR65	634	484	7.5-10	8.5	25.7	10.3	8.0
10.63	23.43	530/1360-15	CR82	685	484	10-13	12.0	25.7	13.6	11.2
10.85	23.92	600/1200-15	CR82	Disc	484	9-11.5	10.0	26.6	12.4	9.4
10.85	23.92	530/1500-15	CR82	697	484	11-15.5	18.0	25.5	16.0	12.6
11.10	24.47	530/1600-15	CR82	758	484	14-17	17.0	25.5	17.5	14.3

P-2 **Formula V**

KG	LBS	Tire Size	Tread Pattern	Racer Price	Hard to Softer 434	Rim Range	Rim Used	Tire Diam	Cross Section	Tread Width
4.65	10.25	120/590-15	CR82	354	434	4-5.5	4.5	22.8	6.3	4.7
6.50	14.33	135/620-15	CR82	373	434	4.5-6	4.5	24.3	7.5	6.5

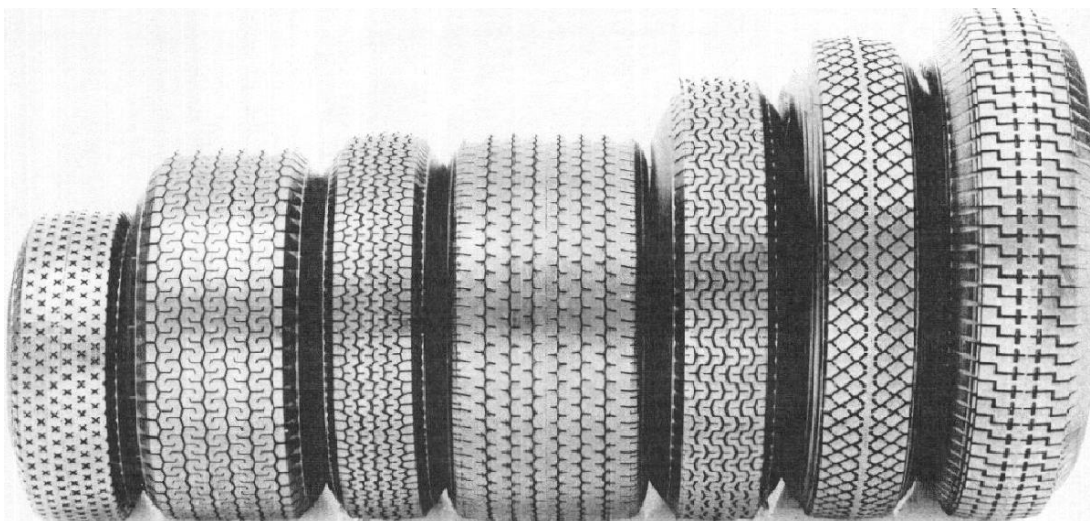

**Dunlop Vintage Tread Patterns**  
**CR-70 CR-65 CR-48 CR-82 R-5 R-1 5-STUD**